


B5512 Control Panels

www.boschsecurity.com



BOSCH
Invented for life

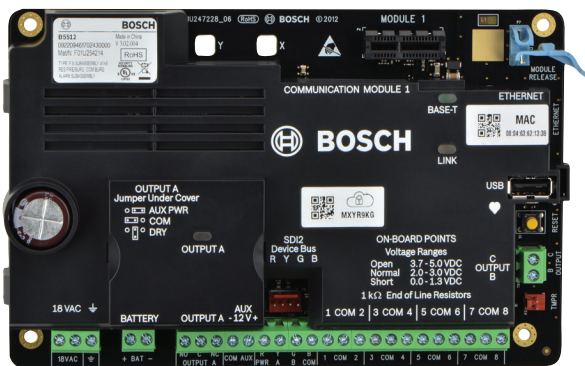

- ▶ Provides up to 48 points using a combination of hardwired or wireless points for installation flexibility and up to 4 areas with perimeter and interior control
- ▶ On-board Ethernet port for Conetix IP alarm communication and remote programming, compatible with modern IP networks including IPv6/IPv4, Auto-IP, and Universal Plug and Play
- ▶ Installer-friendly features for simple installation and communications, including on-board USB for easy on-site RPS programming, plus support for Remote Connect Service (not available in Europe, the Middle East, or Africa), and plug-in PSTN and cellular communication modules for simple installation and communications
- ▶ Remote Security Control (RSC) app which allows users to control their security systems – and view system cameras - remotely from mobile devices such as phones and tablets
- ▶ Programmable keypad shortcuts, situation sensitive on-screen help, and a bilingual user interface make system operation simple and easy

The B5512 Control Panel integrates intrusion and residential fire, providing one simple user interface for both systems. The B5512 provides up to 48 individually identified points that can be split into 4 areas.

The control panel can communicate through its built-in Ethernet port (not applicable to “E” control panels), or through compatible plug-in modules that can send events over the public switched telephone network (PSTN) or over cellular network communications.

With the B5512, you can monitor doors, windows, and motion within areas like showrooms or those that hold inventory. Each user can have a personalized passcode, a wireless keyfob, and a credential to control the system.

Use programmable authority levels with restricted privileges to provide service, security, and cleaning personnel with full or limited access. Use the three programmable outputs (expandable up to 43) to turn on lights or lock and unlock doors. Users can:

- Turn on the system to secure the stockroom while you conduct daily business.
- Perform tests to ensure your system is working properly.
- Set your system to alarm immediately if a door opens.

- Activate the Watch feature so a tone sounds whenever a customer enters.
- Set a schedule for your system to automatically turn on at closing time.
- Use wireless security options to customize your system.

Central monitoring stations provide 24-hour system monitoring with access to vital services. Professional security personnel can test the system, monitor system activity, and alert the police, fire department, or other emergency response teams if necessary.

Functions

Programmable outputs

- Three programmable on-board outputs; one high current using a relay, and two trigger outputs
- Output A, with a contact rating of 3 Amps, can supply up to 1.0 A total current from AUX PWR
- Outputs B and C sink up to 50 mA at 12 VDC
- Four alarm-output patterns
- Programmable bell test

Point response

- 20 custom point indexes
- Selectable point response time
- Cross point capability
- Fire alarm verification
- Dangerous gas indicator includes carbon monoxide (NFPA 720)
- Watch mode

User interface

- Supervision of up to 8 keypads
- Custom keypad text is fully programmable through RPS
- Full function menu including custom functions
- Authority by area and 32 character name for each user
- 14 custom authority levels to restrict system features that each user can access
- Programmable primary and secondary language by user and keypad; select from English, Spanish, French, and Portuguese

Area configurations

Link multiple areas to a shared area such as a lobby or common entryway. The shared area then automatically turns On (arms) when all associate areas are armed and turns Off (disarms) when any one associate area is disarmed. For higher security applications, the Area Re-Arm feature guarantees that areas are always rearmed, and are disarmed for no longer than a specific, configurable, amount of time (for example, service time).

Custom functions

For added convenience, the installer can program custom functions that allow customers to complete complex tasks with one simple action. For example, a custom function can bypass a group of points and arm the system, allowing the user to perform these functions with one easy command. Users can activate custom functions with a keypad, keyfob, token, or

card, or the control panel can activate a function in reaction to a faulted point, or automatically through a scheduled event (SKED).

Passcode security

- Two-man rule. Requires two people with two unique passcodes to be present at the time of opening.
- Early ambush. Allows users to verify that the facility is safe by requiring two passcodes. The control panel sends a duress event if the user does not enter the passcode a second time after inspecting the premises.
- Dual authentication. Requires two forms of identification before processing certain system commands, including turning off the system and opening doors. A standard system user must have a passcode, a credential (token or card), and appropriate command authority permissions.

Easy exit control

The control panel changes from one On (armed) state to another without turning off (disarming) the system. For example, if you change the state from Part On (Perimeter Arm) to All On (Master Arm), the control panel complies and reports the change. Easy Exit Control reduces the number of keystrokes, simplifying system operation.

Programmable passcode-controlled menu list

Passcode-controlled shortcuts provide users only with the options and information pertinent to them, simplifying system operation.

Flexible control

The system provides the flexibility to choose added convenience or high security. For example, you can restrict to a keypad's immediate local area turning on (arming) and turning off (disarming) the system with a passcode, even if the user has access to other areas. This is particularly useful for high security areas, where a user may have access to the area, but would prefer to only turn off (disarm) the area individually rather than with the rest of the system.

Monitor Delay/Delayed Response

Create a special point index that delays the reaction of a point for a specified time (up to 1 hour in minutes and seconds). This delay provides time for the specified condition to reset before activating any annunciation. The system can annunciate locally and send a report, if desired. When the system is armed, the point can respond like a normal point – providing dual functionality. Use this feature to ensure that perimeter doors have not been propped open, or to monitor critical areas such as computer rooms and safes, for example.

System users

The system supports up to 50 users. Each user can have a personalized passcode, a wireless keyfob, and a credential to control the system. You can assign passcodes to one of 14 customized authority levels in each area that can be restricted to operate only during

certain times. Programmable primary and secondary language by user and keypad; select from English, Spanish, French, and Portuguese.

Communication formats

The control panel prioritizes and sends reports to four route groups. Network and phone communications can use one of two communication formats: Modem4, Contact ID. Each group has a programmable primary and backup destination.

The control panel provides flexible communications for most central stations with reporting capabilities such as:

- Individual point numbers
- Opening or closing reports by user and area number
- Remote programming attempts
- Diagnostic reports

IP communication

The control panel can use IP to communicate with a Conettix D6600 or a Conettix D6100IPv6

Communications Receiver/Gateway. Use one of the following for IP:

- The on-board Ethernet connection (the on-board Ethernet port is excluded on “E” versions).
- A B426.
- A plug-in cellular communicator (B440/B440-C/B441/B441-C/B442/B443/B444).

Conettix IP communication provides a secure path that includes anti-replay/anti-substitution features, and enhanced security with up to AES 256-bit encryption (using Cipher Block Chaining (CBC)).

The control panel supports Domain Name System (DNS) for both remote programming and central station communication. DNS provides ease of use, eliminating the need to use static IP addresses as your reporting destination, and accommodates a simple solution for central station disaster recovery. The control panel supports both IPv6 and IPv4 networks.

Communication paths

The control panel accommodates up to four separate phone and four separate network paths to the central station receiver. When resetting alarms or turning a system on and off, the user is identified by name and number.

Personal notification

The control panel can send text messages and emails for personal notification over Ethernet or using a cellular communicator. You can configure up to 16 destinations using a combination of cellular phone numbers and email addresses. The control panel sends notifications in the user’s programmed primary language.

Bosch Remote Connect (Cloud)

Remote Connect simplifies connections from RPS, and the Remote Security Control app, using Bosch Cloud services. This service creates a secure connection to the control panel without specific router settings or the need for a static IP address or DNS.



Notice

The Bosch Remote Connect service is not available in Europe, the Middle East, or Africa.

Firmware updates

The system allows remote firmware updates:

- Control panel updates. Remotely update the control panel firmware for easy feature enhancements without replacing ROM chips.
- Module update support. Remotely update the firmware on connected SDI2 modules for easy feature enhancements without visiting each individual module.

Firmware updates occur through Remote Programming Software (RPS) and the RPS Firmware Update Wizard. The Firmware Update Wizard uses the on-board USB connection or the on-board Ethernet (IP) connection (the on-board Ethernet port is excluded on “E” versions) to transfer firmware updates.

The control panel can optionally receive firmware updates from RPS. Use one of the following communication methods:

- B426
- Plug-in cellular communicator: B440/B440-C/B441/B441-C/B442/B443/B444



Notice

Data rate apply

Cellular firmware updates require more time than Ethernet updates and carrier data rates apply.

A wide variety of input options

Each point:

- Single 1 k Ω , single 2 k Ω , dual 1 k Ω (1 k Ω + 1 k Ω), and No EOL (end-of-line) (EOL) resistor options (for on-board and B208 inputs)
- Programmable for Fire, Intrusion, Gas, and Supervisory devices
- Supports hardwired and wireless devices
- Supports IP cameras by Bosch as point and output devices

IP camera support

The control panel can integrate directly with Bosch IP cameras, using them as fully supervised points and outputs.

Integration of cameras allows the camera’s video motion detection to activate points on the control panel. The control panel’s virtual outputs can be configured to trigger camera actions, including sending video snapshots via email.

Video verification

Ensure priority response by law enforcement and elimination of fines for false alarms through a subscription to Bosch CBS video verification services. The services also optionally enable your monitoring center to speak real-time to an intruder to deter further damage to your site.

**Notice**

The CBS video verification service is not available in Europe, the Middle East, or Africa.

Security and fire detection

The control panel provides eight on-board points, and up to 40 additional off-board points (depending on model and expansion interfaces). You can program individual points to monitor some types of burglar alarms, fire alarms, and supervision devices.

Event log

The event log stores local and reported events. The event log includes information such as time, date, event, area, point, and user. View the event log from a keypad or use RPS to remotely retrieve event information. When the event log reaches a programmed threshold of stored events, it can send an optional report to a receiver.

The event log stores up to 255 local and reported events.

Scheduled events (SKEDs)

The internal clock and calendar start individually scheduled events (SKEDs). SKEDs perform several functions such as turn on or off, relay control, or point bypassing.

The control panel offers:

- Five scheduled events with up to 25 different functions
- Four opening windows and four closing windows
- Four user group windows
- Day-of-week, date-of-month, or holiday only schedules
- One holiday schedule of 366 days (leap year)

Programming

Installers can perform limited programming on-site with a keypad (critical parameters; such as account IDs, central station and RPS IP addresses and phone numbers, reporting formats, and more). They can also do full programming on-site or remotely (attended or unattended) with RPS. A programmable system passcode prevents unauthorized remote programming.

Diagnostics

Keypads and RPS offer diagnostic help for monitoring and troubleshooting. The diagnostics features allow you to view the status of the wired and wireless devices. The features provide the status of the control panel and its connected devices, such as firmware version, power, and missing conditions. View the status of each area.

Remote Security Control app

The Remote Security Control (RSC) app allows users to control their security systems remotely from their devices. Users can:

- Turn their security system On or Off
- Turn specific areas On or Off
- Control outputs for applications such as lighting control
- View live video from Bosch IP cameras

- Grant access remotely by unlocking and locking doors
- The app requires the installing dealer to create a Remote Access Profile for users, and to install the profile on their devices.

Bosch Video Management System integration

With Bosch Video Management System (Bosch VMS) and an intrusion system, the VMS operator has a single user interface to monitor and control the intrusion system combined with video surveillance. With Bosch VMS and a control panel, the operator can, for example:

- View videos triggered by intrusion events, including all relevant information such as areas, point, and user show in the display with the event.
- View areas, points, outputs, and doors – with their statuses – on the Bosch VMS map, providing the exact location in the system.
- Turn on (arm) and turn off (disarm) areas.
- Bypass and unbypass points.

Requirements to integrate Bosch VMS with a control panel:

- A licensed Bosch VMS system using Professional Editions v5.5 or higher or Bosch VMS Enterprise.
- Edition v5.5 or higher.
- Expansion license to integrate the intrusion control panel. One license needed per control panel. Order number MBX-XINT-xx for the expansion license added to a Bosch VMS base license. Refer to the Bosch Video Management Software product page on the Bosch website, www.boschsecurity.com.
- Access to Remote Programming Software (RPS).

Certifications and approvals

Region	Regulatory compliance/quality marks	
USA	ANSI-SIA	CP-01-2010-Control Panel Standard - Features for False Alarm Reduction
Australia	RCM	ACMA
Europe	CE	EMC, LVD, RoHS [B6512, B5512, B5512E, B4512, B4512E, B3512, B3512E]
USA	UL	[B6512, B5512, B4512, B3512]
	UL	UL 365 - Police Station Connected Burglar Alarm Units
	UL	UL 609 - Standard for Local Burglar Alarm Units and Systems
	UL	UL 636 - Holdup Alarm Units and Systems
	UL	UL 985 - Household Fire Warning System Units
	UL	UL 1023 - Household Burglar Alarm System Units
	UL	UL 1076 - Proprietary Burglar Alarm Units and Systems
	UL	UL 1610 - Central Station Burglar Alarm Units

Region	Regulatory compliance/quality marks	
	UL	UL 1635 - Standard for Digital Alarm Communicator System Units
	CSFM	see our website
	FCC	Part 15 Class B
Canada	ULC	{B6512, B5512, B4512, B3512}
	ULC	CAN/ULC S303 - Local Burglar Alarm Units and Systems
	ULC	CAN/ULC S304 - Standard for Signal Receiving Center and Premise Burglar Alarm
	ULC	CAN/ULC S545 - Residential Fire Warning System Control Units
	ULC	CAN/ULC S559 - Fire Signal Receiving Centres and Systems
	ULC	ULC-ORD C1023 - Household Burglar Alarm System Units
	ULC	ULC-ORD C1076 - Proprietary Burglar Alarm Units and Systems
	IC	ICES-003 - Information Technology Equipment (ITE)
Brazil	ANATEL	04712-16-01855 [B5512, B4512, and B3512 when used with B430 or B442]

Installation/configuration notes



Notice

Not all products and features are available in all regions. Consult your local Bosch representative for availability details.

Keypads

B942/B942W Touch Screen Keypad (SDI2)

B930 ATM Style Alphanumeric Keypad (SDI2)

B921C Two-line Capacitive Keypad (SDI2)

B920 Two-line Alphanumeric Keypad (SDI2)

B915/B915I Basic Keypad (SDI2)

Power

CX4010 Plug-in Transformer (18 VAC 22 VA 60 Hz)

ICP-TR1822-CAN Plug-in Transformer (110 VAC primary, 18 VAC 22 VA secondary)

DE-45-18 Transformer

D126 Standby Battery (12 V, 7 Ah)

D1218 Battery (12 V, 18 Ah)

D122 Dual Battery Harness

D122 Dual Battery Harness with long leads

Enclosures

B10 Medium Control Panel Enclosure

B11 Small Control Panel Enclosure

B12 Mounting Plate for D8103 Enclosure

B8103 Universal Enclosure (requires a B12)

D8108A Attack Resistant Enclosure (requires a B12)

D8109 Fire Enclosure (requires a B12)

D8108A-CE Attack Resistant Enclosure with Built-in Transformer (requires a B12)

B-ENCL-1 Metal Enclosure Kit (includes B12 and transformer)

Accessories

B56 Keypad Surface Mount Box

B96 Keypad Trim Bezel

B99 USB Direct Connect Cable

B501-10 Interconnect wiring cables (pack of 10)

Detectors

FCC-380 Carbon Monoxide Detector

F220-P: Photoelectric Smoke Detector

F-220-PTH: Photoelectric/Heat Detector

FCP-OT320 Multisensor Detector Optical/Thermal

FCP-O320 Optical Smoke Detector

FCH-T320 Heat Detector

Bosch conventional detectors, including Professional Series, Blue Line Gen2, Blue Line, Classic Line, Commercial Line, and Ceiling Mount motion detectors, as well as glass break, seismic, request-to-exit, photoelectric, heat, and smoke detectors.

Modules

B201 2-wire Powered Loop Module

B208 Octo-input Module

B308 Octo-output Module

B426 Conettix Ethernet Communication Module

B430 Plug-in Telephone Communicator

B440 Conettix Plug-in Cellular Communicator (using 3G)

B441 Conettix Plug-in Cellular Communicator (using CDMA)

B442 Conettix Plug-in Cellular Communicator (using GPRS)

B443 Conettix Plug-in Cellular Communicator (using HSPA+)

B450 Conettix Plug-in Communicator Interface

B520 Auxiliary Power Supply Module

B810 wireless receiver (RADION)

B820 SDI2 Inovonics Interface Module
 D113 Battery Lead Supervision Module
 D125B Dual Class B Initiating Module
 D129 Class A Initiating Module
 D130 Auxiliary Relay Module
 D132A Smoke Detector Reversing Relay Module
 D133/D134 Relay Module
 D135A Low Battery Disconnect Module
 D185 Reverse Polarity Signaling Module
 D192G Class “B”, Style Y Bell Circuit Supervision

Applications

Remote Programming Software (RPS or RPS-LITE) v6.03 and higher
 Bosch Video Management System v5.5 and higher
 Remote Security Control (RSC)

Conettix receivers

(Managed and configured with Conettix D6200 Programming/ Administration Software v2.00)

Conettix D6600 Communications Receiver/Gateway (with only D6641 line cards installed) with CPU version 01.10.00

Conettix D6100IPv6 Communications Receiver/Gateway with CPU version 61.10.00

Conettix D6100i Communications Receiver/Gateway with CPU version 61.10.00

RADION wireless from Bosch

B810 wireless receiver (RADION)
 RFBT-A/RFBT bill trap
 RFDL-11-A/RFDL-11 TriTech motion detector
 RFDW-RM-A/RFDW-RM recessed mount door/window contact
 RFDW-SM-A/RFDW-SM surface mount door/window contact
 RFGB-A/RFGB glass break detector
 RFKF-A/RFKF two-button keyfob
 RFKF-FBS-A/RFKF-FBS four-button keyfob
 RFKF-TBS-A/RFKF-TBS two-button keyfob
 RFPB-SB-A/ RFPB-SB single-button panic
 RFPB-TB-A/RFPB-TB two-button panic
 RFRP-A/RFRP repeater
 RFSM-A/RFSM smoke detector
 RFPR-12-A/RFPR-12 PIR motion detector

RFPR-C12-A/RFPR-C12 PIR curtain motion detector
 RFUN-A/RFUN universal transmitter

Inovonics Wireless

B820 SDI2 Inovonics Interface Module
 ENKIT-SDI2 SDI2 Inovonics Interface and Receiver Kit. Includes B820 and EN4200
 EN1210 Universal Transmitter (Single-input)
 EN1210EOL Universal Transmitter with EOL Resistor
 EN1210W Door-Window Transmitter with Reed Switch
 EN1215EOL Universal Transmitter with Wall Tamper, Reed Switch, and EOL Resistor
 EN1223D Water-resistant Pendant Transmitter (Double-button)
 EN1223S Water-resistant Pendant Transmitter (Single-button)
 EN1224-ON Multiple-Condition Pendant Transmitter
 EN1233D Necklace Pendant Transmitter (Double-button)
 EN1233S Necklace Pendant Transmitter (Single-button)
 EN1235D Beltclip Pendant Transmitter (Double-button)
 EN1235DF Fixed-location Transmitter (Double-button)
 EN1235S Beltclip Pendant Transmitter (Single-button)
 EN1235SF Fixed-location Transmitter (Single-button)
 EN1247 Glass-break Detector Transmitter
 EN1249 Bill Trap Transmitter
 EN1242 Smoke Detector Transmitter
 EN1260 Wall Mount Motion Detector
 EN1261HT High Traffic Motion Detector
 EN1262 Motion Detector with Pet Immunity
 EN1265 360° Ceiling Mount Motion Detector
 EN4200 Serial Receiver
 EN5040-T High Power Repeater with Transformer

Technical specifications

Communications

Ethernet	10/100 full duplex (N/A for “E” control panels)
----------	---

Environmental considerations

Relative humidity	5% to 93% at +90°F (+32°C), non-condensing
Temperature (operating)	+32°F to +122°F (0°C to +49°C)

Number of...

Areas	4
Custom functions	4
Events	Up to 255
Passcode users	50, plus 1 Installer passcode
Points	48 (8 on-board, up to 40 off-board and virtual)
Programmable outputs	43 (3 on-board, up to 40 off-board and virtual)
RF points	40
IP cameras	4
SKEDs	5

Power Requirements

Current draw (maximum)	Idle 125 mA; Alarm 155 mA
Output (alarm)	1.3 A at 12 VDC
Output (auxiliary, continuous power, and switched auxiliary combined)	800 mA at 12 VDC nominal
Voltage (operating):	12 VDC nominal
Voltage (AC)	CX4010 Plug-in Transformer (18 VAC 22 VA 60 Hz) or ICP-TR1822-CAN Plug-in Transformer (110 VAC primary, 18 VAC 22 VA secondary)

Ordering information**B5512 IP control panel, 48 points**

Supports up to 48 points, 3 on-board outputs, and 4 areas for intrusion, residential fire. On-board Ethernet. Order number **B5512**

B5512E Control panel, 48 points, no IP

The B5512E is available only in kits. Order number **B5512E**

Accessories**B520 Auxiliary power supply module, 2A 12V**

Provides auxiliary power to 12 VDC devices or to SDI2 modules. Order number **B520**

B201 2-Wire Powered Loop

The module provides a single powered initiating device circuit. The module supports compatible 12 V 2-wire smoke detectors. It also supports connecting burglary devices to the control panel. Order number **B201**

B208 SDI2 8-Input Expansion Module

Provides 8 programmable inputs. Order number **B208**

B308 SDI2 8-Output Expansion Module

Provides 8 programmable relays. Order number **B308**

B810 RECEIVER-SDI2

Receives RF signals from RADION transmitters, repeaters, and glassbreaks. Operates at 433.42 MHz. For use with compatible SDI2 bus control panels. Order number **B810**

D122 Dual battery harness, 17" 18AWG

Harness with circuit breaker. Connects two batteries (in parallel) to a compatible control panel. Order number **D122**

D122L Dual battery harness, 35", 12V

Harness with circuit breaker and leads measuring 35 in. (89 cm). Connects two batteries (in parallel) to a compatible control panel in a separate enclosure. Order number **D122L**

D126 Battery, 12V 7Ah

A rechargeable sealed lead-acid power supply used as a secondary power supply or in auxiliary or ancillary functions. Order number **D126**

D1218 Battery, 12V 18Ah

The D1218 is a 12 V 18 Ah sealed lead-acid battery with two bolt-fastened terminals. It is used for standby and auxiliary power. It connects to a compatible control panel using a D122 or D122L Dual battery harness. Order number **D1218**

CX4010 Transformer, plug-in, 18V 22VA

For use in North America. 110 VAC primary voltage input. 18 VAC, 22 VA secondary input. Order number **CX4010**

ICP-TR1822-CAN Transformer, plug-in, 18V 22VA, Canada

For use in Canada. 110 VAC primary voltage input. 18 VAC, 22 VA secondary input. Order number **ICP-TR1822-CAN**

B8103 Universal enclosure, white

White steel enclosure measuring 41 cm x 41 cm x 9 cm (16 in. x 16 in. x 3.5 in.). Order number **B8103**

D8103 Steel enclosure, large, grey

Grey steel enclosure measuring 41 cm x 41 cm x 9 cm (16 in. x 16 in. x 3.5 in.). Order number **D8103**

D8108A Attack resistant enclosure, large, grey

Grey steel enclosure measuring 41 cm x 41 cm x 9 cm (16 in. x 16 in. x 3.5 in.). UL Listed. Includes a lock and key set. Order number **D8108A**

D8109 Fire enclosure, 16x16x3.5", red

Red steel enclosure measuring 16 in. x 16 in. x 3.5 in. (41 cm x 41 cm x 9 cm). UL Listed. Includes a lock and key set.

Order number **D8109**

B10 Steel enclosure, medium, white

White, steel enclosure. Accepts an optional lock and tamper switch. Measures 35.6 cm x 31.8 cm x 7.6 cm (14 in x 12.5 in x 3 in).

Order number **B10**

B11 Steel enclosure, small, white

White, steel enclosure. Accepts an optional lock and tamper switch. Measures 27.8 cm x 25.9 cm x 8.32 cm (10.9 in x 10.2 in x 3.3 in).

Order number **B11**

B12 Mounting plate for D8103 enclosure

Required for mounting select control panels and other devices in B8103, D8103, D8108A, D8109, and BATB Battery Box enclosures.

Order number **B12**

D8004 Transformer enclosure kit, grey

For applications that might require a remote transformer in an enclosure. Can be used with B Series control panels and D9412GV4/D7412GV4 control panels.

Order number **D8004**

D101 Enclosure lock and key set

Short-body lock set with one key supplied. Uses the D102 (#1358) replacement key.

Order number **D101**

D110 TAMPER SWITCH 2/PKG

Screw-on tamper switch that fits all enclosures. Shipped in packages of two.

Order number **D110**

ICP-EZTS TAMPER SWITCH-DUAL

Combination tamper switch with a wire loop for additional tamper outputs.

Order number **ICP-EZTS**

B99 USB direct connect cable

Male A to Male A USB cable for local programming of control panels with on-board USB ports.

Order number **B99**

B915 Basic Keypad

Two-line alphanumeric basic keypad with English function keys.

Order number **B915**

B915I LCD keypad, icon keys, SDI2

Two-line alphanumeric basic keypad with icon function keys.

Order number **B915I**

B920 2 Line Alpha Numeric Keypad (SDI2)

Two-line alphanumeric keypad

Order number **B920**

B921C Two-line Keypad w/Touch keys, Inputs

Two-line alphanumeric keypad with inputs and capacitive touch keys in black.

Order number **B921C**

B930 ATM Style-Alpha Numeric Keypad (SD12)

Five-line ATM style alphanumeric keypad

Order number **B930**

B942 Touch Screen KP Prox/Input/Output, black

Black SDI2 touch screen keypad with inputs and one output.

Order number **B942**

B942W Touch screen KP, prox/input/output,white

White SDI2 touch screen keypad with inputs and one output.

Order number **B942W**

Software Options**D5500CU Upgrade DVD**

RPS software is available for free download on the RPS product page. It is also available on DVD-ROM.

Order number **D5500CU**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia